



**BEYOND**  
fire



[www.osburn-australia.com](http://www.osburn-australia.com)

**BEYOND  
EXPECTATIONS**

High quality and unique design for your comfort

# BEYOND fire

BEYOND... A single word that captures our philosophy and commitment at Osburn. This is our source of inspiration.

What does "BEYOND" mean to Osburn?

BEYOND drives us forward when we look at products. We go beyond with what we do and with our interactions in life. It is more than building and selling products. It's no longer about just doing, but doing with a purpose, doing efficiently. It is about exceeding expectations. BEYOND... drives us to do better, to be more functional and achieve higher performance. We believe great products define a great appliance manufacturer. We are not afraid to take the lead or to stretch the boundaries. When you go BEYOND..., you simply go ahead; you look at the present and envision amazing things happening for the future. That's who we are, our philosophy. Our hope is to share it with you and we invite you to take the time to discover how we go beyond.

The Osburn Team



Featured products **Matrix Series**



# Summary



|                                  |   |
|----------------------------------|---|
| Wood heating and the environment | 4 |
|----------------------------------|---|

## Freestanding Wood Fires

|                     |    |
|---------------------|----|
| 900                 | 5  |
| 1000                | 6  |
| 1600                | 7  |
| 1800                | 8  |
| 2000                | 9  |
| Matrix Freestanding | 10 |
| 2200                | 11 |

|   |    |
|---|----|
| Features, technical data and clearances | 12 |
|---|----|


## Insert Wood Fires

|   |    |
|---|----|
| Matrix Insert                           | 14 |
| Features, technical data and clearances | 15 |

|                                  |    |
|----------------------------------|----|
| Osburn warranty, limited 5 years | 16 |
|----------------------------------|----|



# WOOD HEATING AND THE ENVIRONMENT

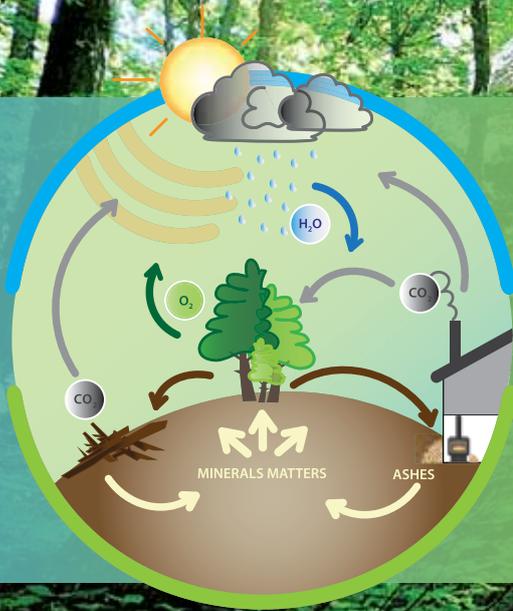


When oil, gas, and coal are burned, the carbon they contain is oxidized to carbon dioxide (CO<sub>2</sub>), the main greenhouse gas. In effect, the combustion of fossil fuels releases ancient carbon (carbon that has been buried within the earth for thousands of years), thereby increasing the atmospheric concentration of carbon dioxide (CO<sub>2</sub>). In comparison, wood combustion can be considered carbon neutral because trees absorb CO<sub>2</sub> as they grow. This process is called carbon sequestration.

Approximately one ton of carbon is sequestered for each cubic meter of wood. When trees mature, die, fall in the forest and decompose, the same amount of carbon is emitted as would be released if they were burned for heat. This cycle can be repeated forever without increasing atmospheric carbon. A healthy forest is not a museum, but a living community of plants and animals. When trees are used for energy, a part of the forests carbon "bank" is diverted from the natural decay and forest cycle into our homes to heat them.

When we heat with wood, we are simply tapping into the natural carbon cycle in which CO<sub>2</sub> flows from the atmosphere to the forest and back. The key to ecologically sound and sustainable wood energy use is to ensure that the forest remains healthy, maintains a stable level of variously aged trees and provides a good habitat for a diversity of other species, both plants and animals. Ensuring there is a healthy fuelwood market is key to a sustainable forestry plan. Landowners have more incentive to remove low value trees and manage their forests sustainably knowing there is a market for this low value material.

The combustion of wood produces small particles that are called PM2.5. Those particles are 30 times smaller than a human hair. They can aggravate certain lung and heart diseases and have been linked with health problems such as asthma. Sources of PM2.5 include combustion under various forms, such as the one used for cars and trucks, wood heating, as well as other industrial processes. While it is true that old technology like open fireplaces and simple heaters could not burn the wood completely, the new generation of wood-burning appliances are designed to burn particles. They produce almost no visible smoke. The wood heating industry has evolved. The vast majority of appliances sold on the market now meet the particles emissions limits set by the Australian Government, which has capped emissions of certified wood heating appliances to no more than 2.5g/kg. In comparison, older conventional wood appliances average 12-17g/kg. Numerous countries, provinces and municipalities, have adopted laws that regulate the sale of wood heating appliances that do not meet the latest standards in terms of particles emissions. Among them, we can name the United States, Australia, New Zealand, as well as numerous countries that are part of the European Union. Canada, British Columbia, Quebec, Nova Scotia, New Brunswick and Newfoundland have also introduced laws regulating the sale of wood-heating appliances.

Wood, when burned in an appliance that has been tested to the AS/NZS 4013 (1999) standards, emits up to 90% less particles. It is a clean, renewable energy source. Furthermore, the reduction in fuelwood consumption reaches up to 33% when advanced wood combustion systems are used. This is because certified wood appliances are more efficient than conventional wood fires.

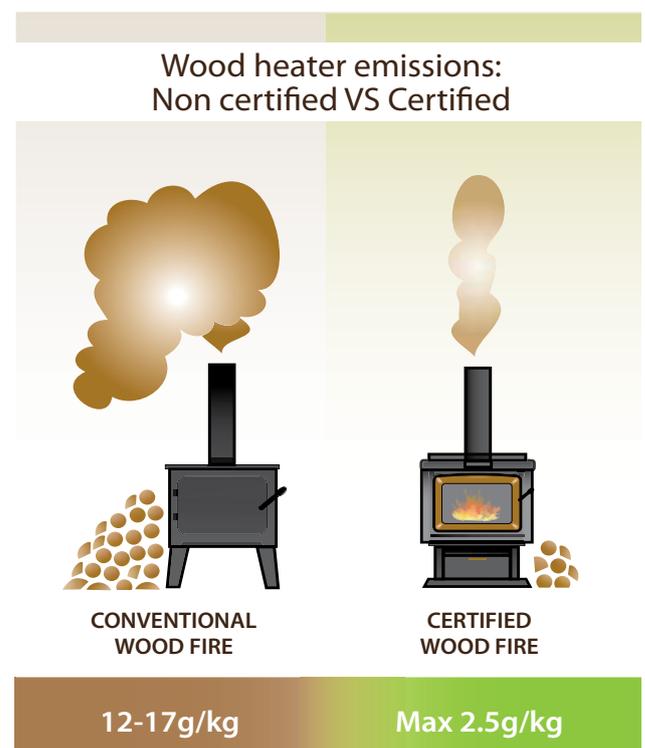



900 pictured with black cast iron legs option.

Emissions  
2.3 g/kg

Overall efficiency  
66%

**900**

**BEYOND  
SIZE**

Osburn is proud to present its 900 wood fire model, the smallest wood fire in the Osburn line which will pack a lot of heat with style! The 900 incorporates the same features and technology of the larger Osburn models. This sturdy little heater will keep you warm and toasty, and will heat up to 120 m<sup>2</sup>. An optional fan is also available for an extra boost. In spite of its size, the Osburn 900 takes an adequate log length of 43 cm, making it an admired option in the small stove market.



Optional fire screen.

Firebox dimensions:

24 cm H  
46 cm W  
32 cm D

Exterior dimensions:

64 cm H  
58 cm W  
53 cm D



Optional fan with variable speed control\*

Maximum log length:  
43 cm



Optional fresh air intake kit.

Fresh air intake kit allows the fire to burn oxygen sourced from outside the home rather than in it. Will also assist combustion in modern air tight homes.

Please note piping for fresh air intake is not included.\*\*

\*See the complete technical data on page 12

\*\*See note 1 on page 13.



**1000**

Emissions  
1.5 g/kg

Overall efficiency  
66%

1000 pictured with pedestal option.

**BEYOND  
FLEXIBILITY**

The Osburn 1000 is the perfect way to effectively heat small areas. This device has all the technical features you need in a high efficiency wood fire. It offers many of the standard and optional features of the other Osburn models, such as pedestal or legs, covered ash drawer, and powerful fan. Overall, this versatile and compact wood fire gives a most impressive performance and is an excellent choice for the discerning buyer.



Optional cast iron door overlay painted black, gold plated or, brushed nickel plated.

Firebox dimensions:  
29 cm H  
46 cm W  
32 cm D

Maximum log length:  
40 cm



Optional cast iron legs painted black or gold plated. Includes ash pan and safety lid.

Exterior dimensions on legs:  
74 cm H  
59 cm W  
59 cm D



Optional pedestal and ash drawer with safety lid.



Optional fan with variable speed control.



1600 pictured with brushed nickel door.

Emissions  
2.4 g/kg

Overall efficiency  
69%

**1600**

**BEYOND  
COMBUSTION**

With its perfect balance between power, efficiency and cleanliness, the Osburn 1600 wood fire is truly unique. The 1600 is a mid-size heating device that earns high marks in performance. Like all wood burning models in the Osburn line, it uses a combustion technology with a secondary air supply tested to meet the latest particulate emissions standards. The particulate matter is burned before being released into the atmosphere for economic combustion that protects the environment. The result is simple, effective and incredibly clean heat.



Optional cast iron door overlay painted black or golden fire brown, gold plated, or brushed nickel plated.

Firebox dimensions:  
30 cm H  
46cm W  
38 cm D

Maximum log length:  
43cm



Optional cast iron legs painted black, gold plated or brushed nickel  
Includes ash pan and safety lid.

Exterior dimensions on legs:  
75 cm H  
64cm W  
69 cm D



Optional pedestal and ash drawer with safety lid.

Exterior dimensions on pedestal:  
75 cm H  
64 cm W  
69 cm D



Optional fan with variable speed control.



**1800**

Emissions  
1.4 g/kg

Overall efficiency  
56%

1800 pictured with black door overlay and black louver and trivet.

**BEYOND  
CHARACTER**

The 1800/2200 series symbolizes Osburn's elegance and technical know-how. The 1800/2200 series wood fires are the company's flagship line, and their distinctive bay windows provide a unique view of the wood fire. All the fires in this series are equipped with detachable trivets and practical covered ashtrays. You can also match them to your décor by selecting one of several possible combinations of door and moulding finishes (black, gold or brushed nickel).



Optional door overlay painted black, gold plated, or brushed nickel plated.

Optional louver and trivet painted black, gold plated, or brushed nickel plated.

Firebox dimensions:  
29cm H  
43cm W  
37cm D

Maximum log length:  
41cm



Solid pedestal construction for ultimate stability.

Exterior dimensions:  
73cm H  
59cm W  
57cm D



Ash drawer with safety lid.



Optional fan with variable speed control.



2000 pictured with brushed nickel door.

Emissions  
1.9 g/kg

Overall efficiency  
60%

**2000**

BEYOND  
CHARM

The Osburn 2000 is one of the latest additions to the Osburn family of wood fires. Its cast-iron door, which features the distinctive lines you've come to expect from Osburn, gives it a look combining the contemporary and the traditional. The Osburn 2000 will delight the most serious of wood fire enthusiasts who want both style and heating power. Variable speed fan, and optional cast-iron legs, make the Osburn 2000 the most sought-after model of the season!



Cast iron door overlay painted black, gold plated, or brushed nickel plated option.

Firebox dimensions:  
29cm H  
53cm W  
44cm D

Maximum log length:  
51cm



Optional cast iron legs painted black, gold plated or brushed nickel plated. Includes ash pan and safety lid.

Exterior dimensions:  
80cm H  
69cm W  
66cm D



Fan with variable speed control included.



Optional fresh air intake kit.

Fresh air intake kit allows the fire to burn oxygen sourced from outside the home rather than in it. Will also assist combustion in modern air tight homes.

Please note piping for fresh air intake is not included.\*\*

\*See the complete technical data on page 13.

\*\*See note 1 on page 13.



# Matrix

Emissions  
1.9 g/kg

Overall efficiency  
60%

Matrix pictured with soapstone panels.

## BEYOND CONTEMPORARY

The Matrix wood fire's clean and modern lines is sure to bring a European touch to any room. Inspired by the renowned Finnish fireplaces, the top of the stove includes two rich pieces of soapstone. This Canadian mined soapstone is renowned for its ability to retain heat, and is available also as a kit for the Matrix's side panels. Not only will this provide an eye-catching detail to your wood fire, but is perfect for radiating warmth overnight - a true combination of elegance and utility. Logs can be conveniently placed underneath the large firebox, making the Matrix not only stylish, but practical.



Optional soapstone or black painted panel kits.

Firebox dimensions:  
29cm H  
53cm W  
44cm D

Maximum log length:  
51cm



Reversible door (hinged on left or right).

Ash pan with safety lid.

Exterior dimensions:  
91cm H  
60cm W  
57cm D



Optional fresh air intake kit.

Fresh air intake kit allows the fire to burn oxygen sourced from outside the home rather than in it. Will also assist combustion in modern air tight homes.

Please note piping for fresh air intake is not included.\*\*



Fan with variable speed control included.

Quick connect thermodisc included for heat activation.



Optional fire screen.



2200 pictured with brushed nickel door overlay, louver and trivet option.

Emissions  
2.1 g/kg

Overall efficiency  
57%

**2200**

BEYOND  
STYLE

Although similar in many respects to the 1800 model, the 2200 fire is more suited to more intensive, continuous use. Its 20% larger firebox is designed to maintain steady heat over a longer period. A powerful, fan is available as an option. The glass surface of the bay window is also 20% larger than that of the 1800 model, providing a wonderful view of the fire from every angle. In short, the Osburn 2200 offers a perfect combination of utility and enjoyment!



Optional door overlay painted black, gold plated, or brushed nickel plated.

Optional louver and trivet painted black, gold plated, or brushed nickel plated.

Firebox dimensions:  
29cm H  
48cm W  
43cm D

Maximum log length:  
46cm



Solid pedestal construction for ultimate stability

Exterior dimensions:  
78cm H  
65cm W  
65cm D



Ash drawer with safety lid.



Optional fan with variable speed control.

# Technical data: Freestanding Wood Fires



## GENERAL FEATURES

| MODEL                                    | 900   | 1000            | 1600            | 1800            |
|--|---|-----------------|-----------------|-----------------|
| Colour                                   | Metallic Black                                | Metallic Black  | Metallic Black  | Metallic Black  |
| Combustion technology                    | Non-catalytic                                 | Non-catalytic   | Non-catalytic   | Non-catalytic   |
| Heating capacity (Note1)                 | 120m2   | 150m2           | 190m2           | 190m2           |
| Overall average efficiency (hardwood)    | 76%   | 66%             | 69%             | 56%             |
| Door opening size - mm - (W x H)         | 380 x 190                                     | 390 x 220       | 390 x 220       | 440 x 220       |
| Firebox dimensions - mm - (W x H x D)    | 460 x 240 x 320                               | 460 x 290 x 320 | 460 x 300 x 380 | 430 x 290 x 370 |
| Emissions : weighted average, in g/kg    | 2.3g / kg                                     | 1.5g / kg       | 2.4g / kg       | 1.5g / kg       |
| Glass viewing area                       | 0.58m2  | 0.08m2          | 0.08m2          | 0.14m2          |
| Door frame                               | Cast iron                                     | Cast iron       | Cast iron       | Steel           |
| Maximum log length - cm                  | 43  | 40              | 43              | 41              |
| Ash drawer with safety lid               | No  | Yes             | Yes             | Yes             |
| Flue size                                | 150mm / 6"                                    |                 |                 |                 |
| Glass type                               | Ceramic glass                                 |                 |                 |                 |
| Adjustable handle                        | Yes   |                 |                 |                 |
| Self-cleaning glass system               | Yes   |                 |                 |                 |
| Warranty                                 | Limited 10 years                              |                 |                 |                 |
| Safety, emissions and efficiency testing | According to AS/NZS 4013:1999 and AS/NZS 4012 |                 |                 |                 |

## SPECIFIC FEATURES

| MODEL  | 900                         | 1000     | 1600     | 1800     |
|--|-----------------------------|----------|----------|----------|
| <b>Exterior dimensions and weight</b>                                    |                             |          |          |          |
| Height - mm  | 640                         | 740      | 750      | 730      |
| Width - mm   | 580                         | 590      | 640      | 590      |
| Depth - mm   | 530                         | 590      | 690      | 570      |
| Weight   | 79 kg                       | 114 kg   | 158 kg   | 150 kg   |
| <b>Clearances from unit to heat sensitive material (figures 1 and 2)</b> |                             |          |          |          |
| 1 - Side - mm  | 470                         | 350      | 325      | 450      |
| 2 - Back - mm  | 120 (155 with optional fan) | 100      | 125      | 125      |
| 3 - Corner - mm  | 300                         | 150      | 150      | 75       |
| 4 - Floor protection on side - mm  | 200                         | 200      | 200      | 200      |
| 5 - Floor protection in front of unit - mm                               | 350                         | 300      | 300      | 300      |
| <b>Options</b>   |                             |          |          |          |
| Fan  | Optional                    | Optional | Optional | Optional |
| Door overlay, painted black  | N/A                         | Optional | Optional | Optional |
| Door overlay, 24K gold plated  | N/A                         | Optional | Optional | Optional |
| Door overlay, brushed nickel plated                                      | N/A                         | Optional | Optional | Optional |
| Pedestal   | N/A                         | Optional | Optional | Standard |
| Legs, painted black  | Standard                    | Optional | Optional | N/A      |
| Louvre and trivet, black painted   | N/A                         | N/A      | N/A      | Optional |
| Louvre and trivet, 24K gold plated                                       | N/A                         | N/A      | N/A      | Optional |
| Louvre and trivet, brushed nickel plated                                 | N/A                         | N/A      | N/A      | Optional |
| Soapstone panel kit  | N/A                         | N/A      | N/A      | N/A      |
| Panel kit, painted black   | N/A                         | N/A      | N/A      | N/A      |

## CLEARANCES TO HEAT SENSITIVE MATERIAL

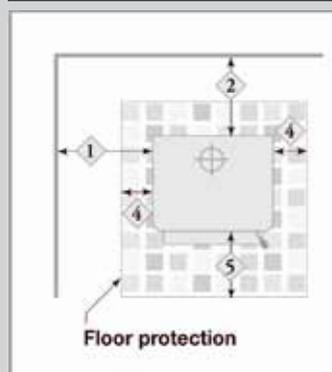


FIGURE 1

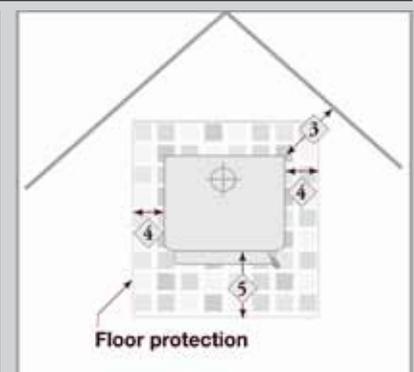


FIGURE 2

# Technical data: Freestanding Wood Fires



## GENERAL FEATURES

| MODEL                                    | 2000  | MATRIX                | 2200            |
|--|---|-----------------------|-----------------|
| Colour                                   | Metallic Black                                | Metallic Black        | Metallic Black  |
| Combustion technology                    | Non-catalytic                                 | Non-catalytic         | Non-catalytic   |
| Heating capacity (Note1)                 | 240m2   | 240m2                 | 240m2           |
| Overall average efficiency (hardwood)    | 60%   | 60%                   | 57%             |
| Door opening size - mm - (W x H)         | 440 x 230                                     | 440 x 220             | 480 x 230       |
| Firebox dimensions - mm - (W x H x D)    | 530 x 290 x 440                               | 530 x 290 x 440       | 480 x 290 x 430 |
| Emissions : weighted average, in g/kg    | 1.9g / kg                                     | 1.9g / kg             | 2.1g/kg         |
| Glass viewing area                       | 0.09m2  | 0.13m2                | 0.17m2          |
| Door frame                               | Cast iron                                     | Cast iron, reversible | Steel           |
| Maximum log length - cm                  | 51  | 51                    | 46              |
| Ash drawer with safety lid               | Yes   | Yes                   | Yes             |
| Flue size                                | 150mm / 6"                                    |                       |                 |
| Glass type                               | Ceramic glass                                 |                       |                 |
| Adjustable handle                        | Yes   |                       |                 |
| Self-cleaning glass system               | Yes   |                       |                 |
| Warranty                                 | Limited 10 years                              |                       |                 |
| Safety, emissions and efficiency testing | According to AS/NZS 4013:1999 and AS/NZS 4012 |                       |                 |

## SPECIFIC FEATURES

| MODEL  | 2000     | Matrix   | 2200     |
|--|----------|----------|----------|
| <b>Exterior dimensions and weight</b>                                    |          |          |          |
| Height - mm  | 800      | 910      | 780      |
| Width - mm   | 690      | 690      | 650      |
| Depth - mm   | 660      | 570      | 650      |
| Weight   | 186 kg   | 243 kg   | 201 kg   |
| <b>Clearances from unit to heat sensitive material (figures 1 and 2)</b> |          |          |          |
| 1 - Side   | 350      | 290      | 450      |
| 2 - Back   | 160      | 100      | 125      |
| 3 - Corner   | 200      | 100      | 75       |
| 4 - Floor protection on side   | 200      | 200      | 200      |
| 5 - Floor protection in front of unit                                    | 300      | 300      | 400      |
| <b>Options</b>   |          |          |          |
| Fan  | Standard | Standard | Optional |
| Door overlay, painted black  | Optional | N/A      | Optional |
| Door overlay, 24K gold plated  | Optional | N/A      | Optional |
| Door overlay, brushed nickel plated                                      | Optional | N/A      | Optional |
| Pedestal   | Optional | Standard | Standard |
| Legs, painted black  | Optional | N/A      | N/A      |
| Louvre and trivet, black painted   | N/A      | N/A      | Optional |
| Louvre and trivet, 24K gold plated                                       | N/A      | N/A      | Optional |
| Louvre and trivet, brushed nickel plated                                 | N/A      | N/A      | Optional |
| Soapstone panel kit  | N/A      | Optional | N/A      |
| Panel kit, painted black   | N/A      | Optional | N/A      |

Note 1: Fresh air intake requires 5" flexible insulated piping.

Technical data contained in this brochure is for reference only. Any installation done must be according to the data and drawings detailed in the Owner's manual.



# Matrix Insert

Emissions  
1.9 g/kg

Overall efficiency  
60%

Matrix Insert pictured with  
reversible door

## BEYOND CONTEMPORARY

The Matrix wood insert defines the new standards for contemporary look and performance. The availability of a reversible cast iron door, and the option for zero clearance installations make this fire one of the most versatile on the market. Nothing beats the mesmerising effect of a fire, and with the Matrix Insert you can enjoy the ambiance of an open flame by using the optional fire screen. Sleek design and solid construction will ensure this insert becomes the focal point of the room.




Reversible cast iron door  
(hinged on left or right).

Firebox dimensions:  
29cm H  
53cm W  
44cm D

Maximum log length:  
50cm

Cast iron faceplate (included):  
63cm H  
91cm W

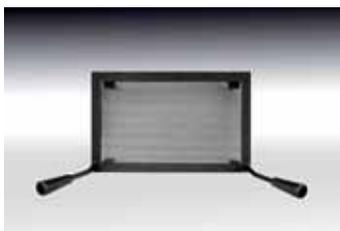

Optional fire screen.

Exterior dimensions:  
With faceplate (included):  
64cm H  
91cm W  
53cm" D

Without faceplate:  
60cm H  
72cm W  
54cm D



Heat activated fan with variable  
speed control included.



Optional fresh air intake kit.

Fresh air intake kit allows the fire to  
burn oxygen sourced from outside  
the home rather than in it. Will also  
assist combustion in modern air tight  
homes.

Please note piping for fresh air intake  
is not included.\*\*

# Technical data: Insert Wood Fires




## GENERAL FEATURES

| MODELS                                   | Matrix Insert                                 |
|--|---|
| Colour                                   | Metallic Black                                |
| Burn time (Note 1)                       | 6 to 8 hours                                  |
| Combustion technology                    | Non-catalytic                                 |
| Heating capacity (Note1)                 | 240m <sup>2</sup>                             |
| Maximum average heat output (hardwood)   | 20 kW   |
| Overall average efficiency (hardwood)    | 60%   |
| Door opening size - cm - (W x H)         | 44 x 23                                       |
| Firebox dimensions - cm - (W x H x D)    | 53 x 29 x 44                                  |
| Emissions : weighted average, in g/kg    | 1.9g / kg                                     |
| Glass viewing area                       | 0.15m <sup>2</sup>                            |
| Fan                                      | Standard                                      |
| Door colour                              | Painted Black                                 |
| Door frame                               | Cast iron w. logo                             |
| Maximum log length - cm                  | 51  |
| Flue size                                | 150mm / 6"                                    |
| Glass type                               | Ceramic glass                                 |
| Adjustable handle                        | Yes   |
| Self-cleaning glass system               | Yes   |
| Safety, emissions and efficiency testing | According to AS/NZS 4013:1999 and AS/NZS 4012 |

## SPECIFIC FEATURES

| MODELS  | Matrix Insert   |
|---|-----------------|
| <b>Exterior dimensions and weight</b>   |                 |
| Height - mm   | 600             |
| Width - mm  | 720             |
| Depth - mm  | 540             |
| Weight - kg   | 218 kg          |
| <b>Clearances from unit to combustible materials (see figure 1)</b>                 |                 |
| A- Combustible adjacent sidewall - mm   | 30              |
| B- Combustible side surround - mm   | 80              |
| C- Combustible top surround - mm  | 670             |
| D- Combustible mantle shelf - mm  | 760             |
| E- Minimum floor protection in front of unit - mm                                   | 500             |
| F, G, H- Suggested fireplace opening** - mm (HxW x D)                               | 630 x 750 x 572 |
| F, G, H-Suggested fireplace opening for zero clearance application** - mm (HxW x D) | 780 x 890 x 600 |
| I- Maximum projection of shelf - mm   | 250             |
| Projection into the room, minimum / maximum - mm                                    | 50 / 100        |
| <b>Faceplate dimensions</b>   |                 |
| Regular in cast iron (included) - mm - (H x W)                                      | 640 x 910       |

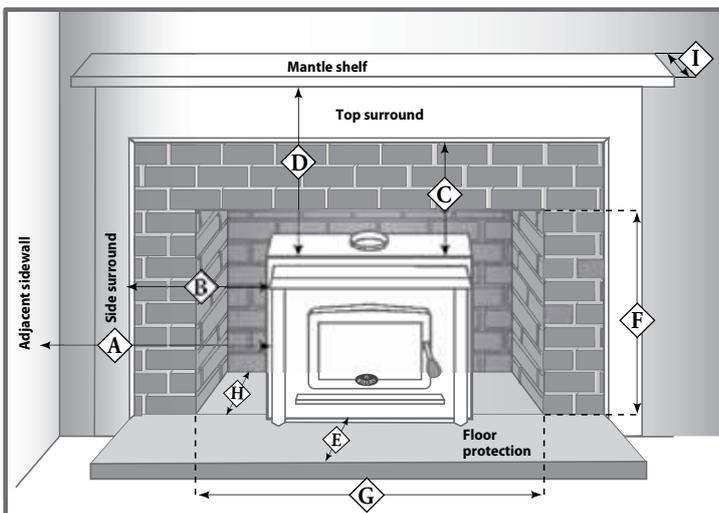

**Figure 1**

**\*\*Technical data and suggested fireplace opening contained in this brochure are for reference only. Any installation must be done according to the data and drawings detailed in the Owner's manual.**

Note 1 : Fresh air intake requires 5" flexible insulated piping.



## OSBURN WARRANTY

All our Osburn fires are guaranteed for 10 years.


We warranty our fire boxes to be free from defects in material or workmanship under normal use and service. The warranty (on the firebox excluding attachments) is for 10 years from date of purchase.

\*1 year warranty on all internal fire parts.



**GlenDimplex**  
AUSTRALIA

Unit 1, 21 Lionel Road  
Mount Waverley, Victoria 3149  
Tel. 1-300-554-155  
Fax 1-800-058-900  
E-mail: [sales@glendimplex.com.au](mailto:sales@glendimplex.com.au)  
Web: [www.glendimplex.com.au](http://www.glendimplex.com.au)

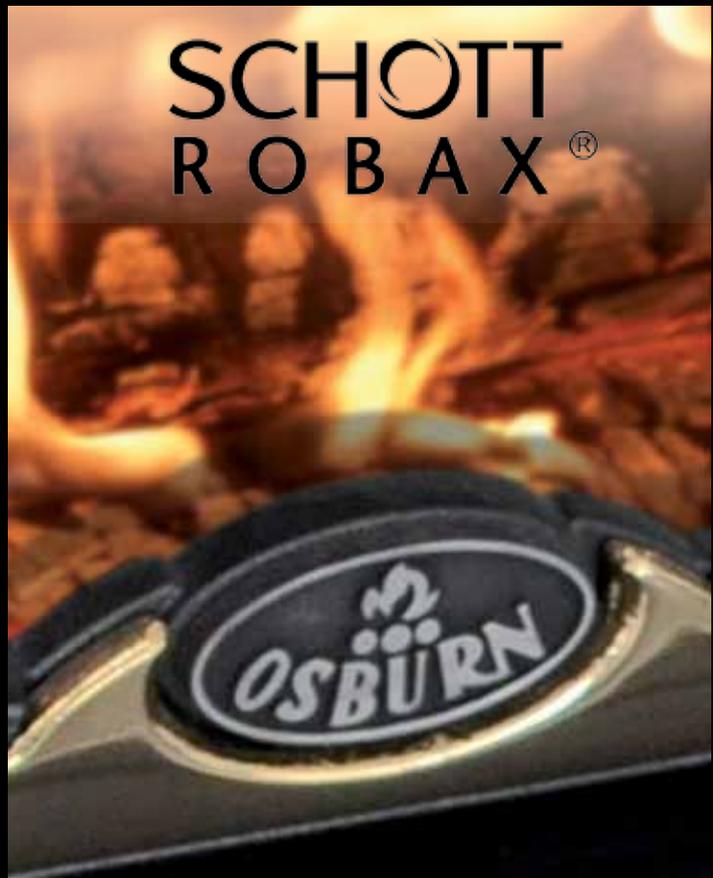

## Schott Robax Ceramic Glass

The OSBURN-SCHOTT ROBAX system is one of the highest quality glass and heater product combination on the market. This allows OSBURN to offer a Limited Lifetime Warranty on Robax ceramic glass for all OSBURN appliances.

Conducted consumer studies identify that people want an unobstructed view of the fire, but without compromising safety. The glass "shield" is seen as the needed protection from the fire's unpredictable aspects. OSBURN chose the SCHOTT ROBAX solution delivering all of the benefits that a consumer wants out of a fire but without the risks associated to it.

Because the way the entire system works together (SCHOTT ROBAX ceramic glass and OSBURN technology), it is the most efficient glass solution available in the market given its high IR transmission values and its high temperature resistance. A high IR transmission means that the heat produced inside the firebox is transferred through the glass more efficiently. The OSBURN-SCHOTT ROBAX ceramic glass can withstand the highest temperatures of any glass on the market.

For more details go to:  
[www.osburn-australia.com](http://www.osburn-australia.com)

Authorised stockist :

Notice: Some changes may have been made to the products or technical data after the publication of this brochure. Osburn reserves itself the right to modify its products at any time without any obligation.